

**ML7xx45 SERIES**

Notice: Some parametric limits are subject to change.

1310nm InGaAsP FP LASER DIODES

**TYPE  
NAME**

**ML720J45S , ML720K45S, ML720Y45S**  
**ML725B45F , ML725C45F**

**DESCRIPTION**

ML7XX45 series are InGaAsP laser diodes which provide a stable, single transverse mode oscillation with emission wavelength of 1310nm and standard continuous light output of 5mW.

ML7XX45 are hermetically sealed devices having the photo diode for optical output monitoring. This is suitable for such applications as FTTH (Fiber to the Home) and ~ 1Gbps Ethernet / Fiber channel systems.

**FEATURES**

- 1310nm typical emission wavelength, FP-LDs
- Low threshold current, low operating current
- Wide temperature range operation (Tc=-40 to 85deg.C)
- Φ5.6mm TO-CA N package  
Flat window cap : ML720J45S, ML725B45F  
Ball lens cap : ML720K45S, ML725C45F, ML720Y45S

**APPLICATION**

- ~155Mbps FTTH system
- ~1Gbps Ethernet , Fiber channel

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Conditions	Ratings	Unit
Po	Light output power	CW	10[7]	mW
VRL	Laser reverse voltage	-	2	V
VRD	PD reverse voltage	-	20	V
IFD	PD forward current	-	2	mA
Tc	Operation temperature	-	-40 to +85	deg.C
Tstg	Storage temperature	-	-40 to +100	deg.C

**ELECTRICAL/OPTICAL CHARACTERISTICS(Tc=25°C)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Ith	Threshold current	CW	3	5	15	mA
Iop	Operation current	CW, Po=5mW	10	20	35	mA
Vop	Operating voltage	CW, Po=5mW	---	1.1	1.5	V
η	Slope efficiency	CW, Po=5mW	0.3[0.2]	0.4[0.3]	0.7[0.5]	mW/mA
λc	Center wavelength	CW, Po=5mW	1290	1310	1330	nm
Δλ	Spectral Width	CW, Po=5mW,RMS(-20dB)	---	1	2	nm
θ	Beam divergence angle(parallel)	CW, Po=5mW	---	25[11]	---	deg.
θ ⊥	Beam divergence angle(perpendicular)	CW, Po=5mW	---	30[11]	---	deg.
tr,tf	Rise and Fall time (10%-90%)	Ib=Ith,Po=5mW,10-90%	---	0.3	0.7	nsec
Im	Monitor Current (PD)	CW, Po=5mW, VRD=1V,	0.1	0.5	0.9	mA
Id	Dark Current (PD)	VRD=10V	---	---	0.1	μA
Ct	Capacitance (PD)	VRD=10V, f=1MHz	---	10	20	pF
Pf(Note2)	Fiber Coupling characteristics at peak coupling<3>	CW, PL=5mW,SI10/125	0.4	0.8	---	mW
Df(Note2)		CW, PL=5mW,SI10/125	5.0	5.8	6.2	mm
		ML720Y45S	6.0	6.5	7.0	

Note : &lt;1&gt; [ ] applied to the lens cap type.

Note : &lt;2&gt; Pf,Df are applied to the ball lens type.

Note : &lt;3&gt; Df is a distance between reference plane of the base to the fiber.



MITSUBISHI  
ELECTRIC



May 2004

## **mitsubishi laser diodes**

# **ML7xx45 SERIES**

## **1310nm InGaAsP FP LASER DIODES**

## **OUTLINE DRAWINGS**

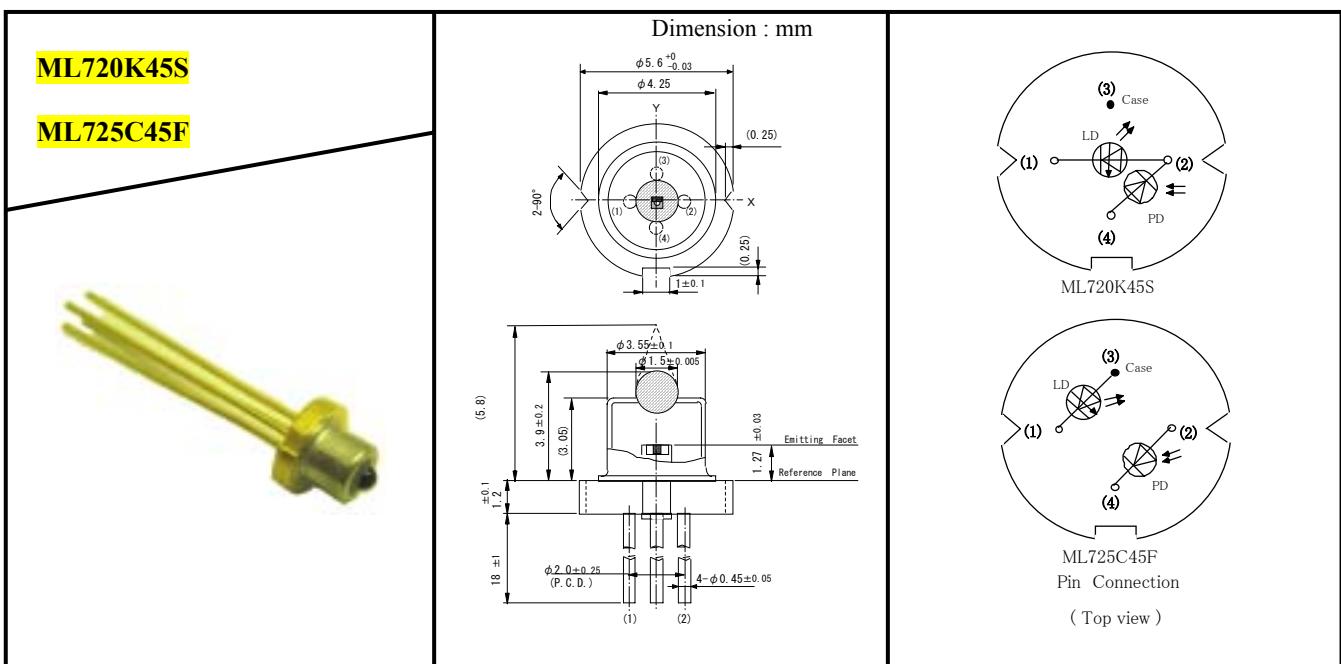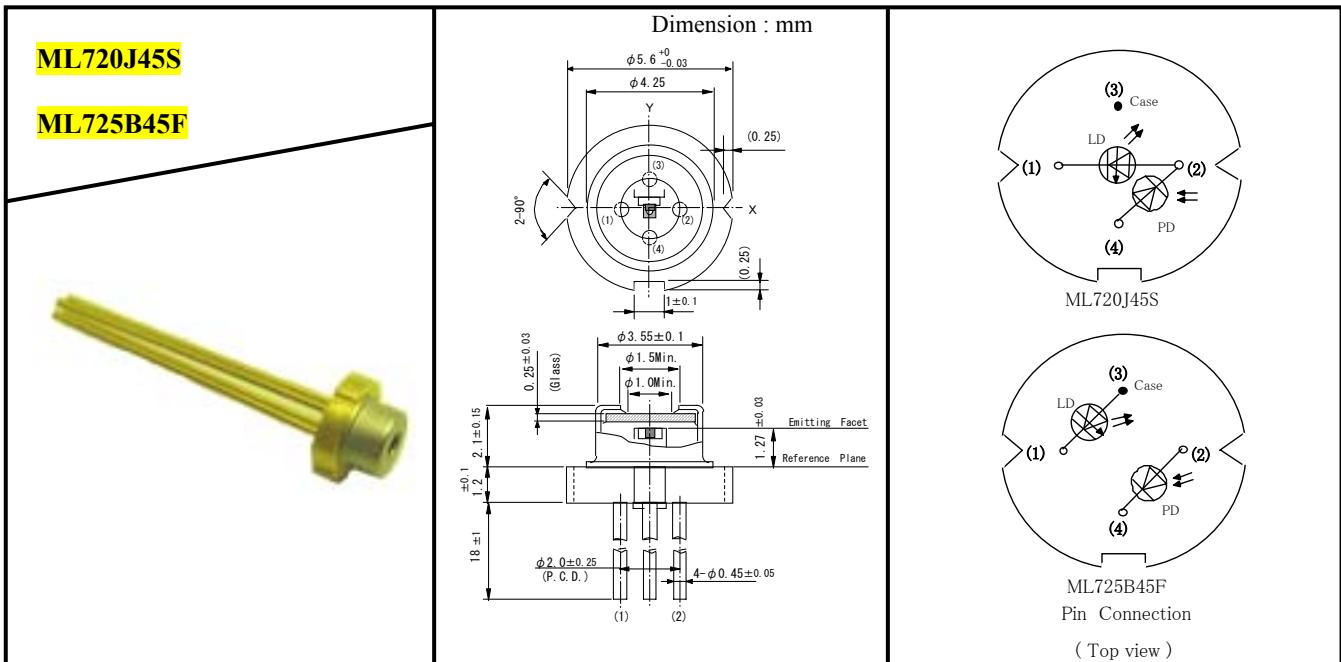

**MITSUBISHI  
ELECTRIC**

May 2004

OUTLINE DRAWINGS

